


Aluminum LED Strip

Series Type: A0809

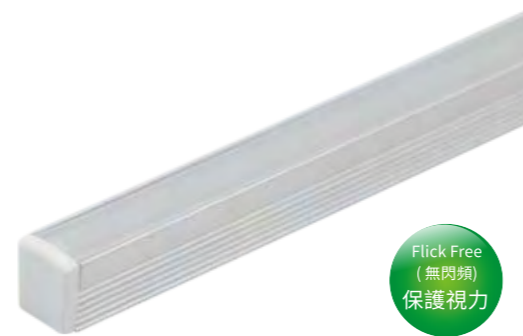


Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- PC cover : milky
- Size: 7.8mm (W) x 9.0 mm (H)
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Aluminum to maximize heat dissipation
- Installation in serial for seamless lighting output
- Uniform light emission without LED spot
- Application: Kitchen cabinet, Bathroom cabinet ,Closet, Show cabinet, Retail shop,etc



- PC蓋:乳白色
- 尺寸: 7.8毫米(寬)X9毫米(高)
- 使用SPM設計-電源電路保護,在故障時切斷單個LED
- 採用鋁框架使散熱最大化
- 串聯安裝以實現無縫照明輸出
- 發光均勻,無LED光點
- 應用:廚櫃、浴室櫃、壁櫥、展示櫃、零售店等



Unit : mm

Specification 產品規格 >>

| Model 型號 | DC Voltage 電壓 | Wattage 功率 | Length 長度 | Lamp Life 光度壽命 | Colour Temp 色溫 | Lumen Output 輸出流明 | Color Rendering 顯色度 | Beam Angle 光速角度 | Operating Temperature 工作溫度 |
|----------------------|------------------|---------------|--------------|-------------------|---------------------|----------------------|------------------------|--------------------|-------------------------------|
| | (V) | (W) | (mm) | (Hrs) | (K) | (Lm/W) | (CRI) | (°) | (°C) |
| CBL-A0809-S1004-109A | 12/24 | 4 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A0809-S1008-109A | 12/24 | 8 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A0809-S1205-109A | 12/24 | 5 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A0809-S1210-109A | 12/24 | 10 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI)、長度,可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9,總諧波指數THD<15%,可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試,環保物料(RoHS),光生物安全為Exemption Group及其它測試,保證客戶使用更安心滿意

Aluminum LED Strip

Series Type: A1110




Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- PC cover : milky
- Size: 10.8 mm (W) x 10mm (H)
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Aluminum to maximize heat dissipation
- Installation in serial for seamless lighting output
- Uniform light emission without LED spot
- Application: Kitchen cabinet, Bathroom cabinet ,Closet, Show cabinet, Retail shop,etc



- PC蓋:乳白色或透明
- 尺寸:10.8毫米(寬)X10毫米(高)
- 使用SPM設計-電源電路保護,在故障時切斷單個LED
- 採用鋁框架使散熱最大化
- 串聯安裝以實現無縫照明輸出
- 發光均勻,無LED光點
- 應用:廚櫃、浴室櫃、壁櫥、展示櫃、零售店等



Unit : mm

Specification 產品規格 >>

| Model 型號 | DC Voltage 電壓 | Wattage 功率 | Length 長度 | Lamp Life 光度壽命 | Colour Temp 色溫 | Lumen Output 輸出流明 | Color Rendering 顯色度 | Beam Angle 光速角度 | Operating Temperature 工作溫度 |
|----------------------|------------------|---------------|--------------|-------------------|---------------------|----------------------|------------------------|--------------------|-------------------------------|
| | (V) | (W) | (mm) | (Hrs) | (K) | (Lm/W) | (CRI) | (°) | (°C) |
| CBL-A1110-S1004-108A | 12/24 | 4 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A1110-S1008-109A | 12/24 | 8 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A1110-S1205-109A | 12/24 | 5 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |
| CBL-A1110-S1210-109A | 12/24 | 10 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 120 | -20~+45 |

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI)、長度,可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9,總諧波指數THD<15%,可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試,環保物料(RoHS),光生物安全為Exemption Group及其它測試,保證客戶使用更安心滿意