



Thermal Conductive LED Light Strip

Series Type: P1013

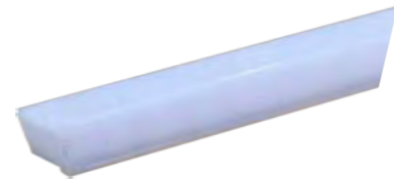


Features 產品特點 >>

- Size: 10.00mm (W) x 13.00mm (H)
- Uniform light emission, 270 degree (3-sectional) lighting output
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Minimum cutting length < 3mm,
- Thermal conductive plastic to maximize heat dissipation
- Installation in serial for seamless lighting output
- Uniform light emission without LED spot
- Application: Kitchen cabinet, Bathroom cabinet, Closet, Show cabinet, Retail chop, etc

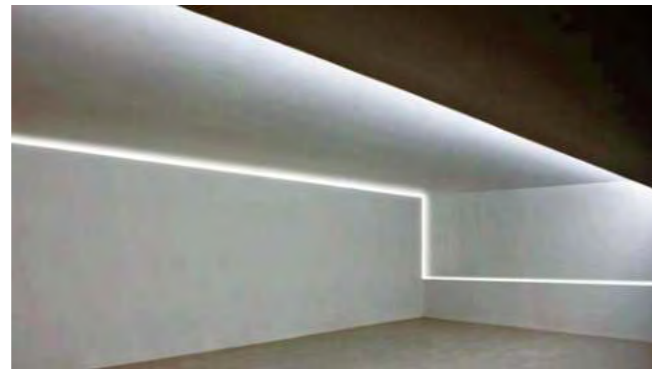

- 尺寸: 10.00毫米(寬)x13.00毫米(高)
- 最小切割長度<3mm
- 使用SPM設計-電源電路保護, 在故障時切斷單個LED
- 採用最佳散熱的導熱塑膠
- 串聯安裝以實現無縫照明輸出
- 發光均勻,無LED光點
- 應用: 廚櫃、浴室櫃、衣櫃、展示櫃、零售店等



Specification 產品規格 >>

| Model 型號 | DC Voltage 電壓 (V) | Wattage 功率 (W) | Length 長度 (mm) | Lamp Life 光度壽命 (Hrs) | Colour Temp 色溫 (K) | Lumen Output 輸出流明 (Lm/W) | Color Rendering 顯色度 (CRI) | Beam Angle 光速角度 (°) | Operating Temperature 工作溫度 (°C) |
|----------------------|-------------------|----------------|----------------|----------------------|---------------------|--------------------------|---------------------------|---------------------|---------------------------------|
| CBL-P1013-S1004-109A | 12/24 | 4 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P1013-S1008-109A | 12/24 | 8 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P1013-S1205-109A | 12/24 | 5 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P1013-S1210-109A | 12/24 | 10 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


Thermal Conductive LED Light Strip

Series Type: P0707




Features 產品特點 >>

- Size: 6.99mm (W) x 6.99mm (H)
- Uniform light emission, 270 degree (3-sectional) lighting output
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Minimum cutting length < 3mm,
- Thermal conductive plastic to maximize heat dissipation
- Installation in serial for seamless lighting output
- Uniform light emission without LED spot
- Application: Kitchen cabinet, Bathroom cabinet, Closet, Show cabinet, Retail chop, etc

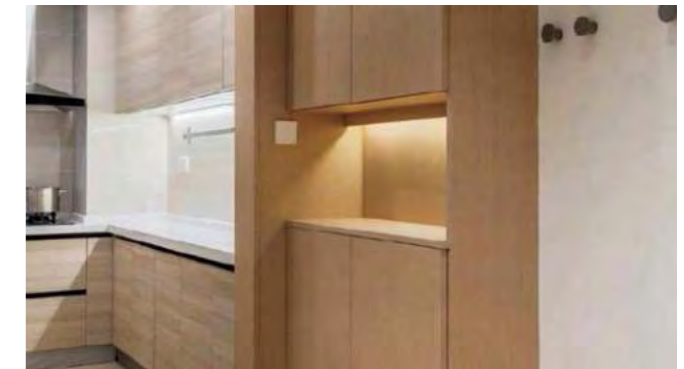

- 尺寸: 6.99毫米(寬)x6.99毫米(高)
- 最小切割長度<3mm
- 使用SPM設計-電源電路保護, 在故障時切斷單個LED
- 採用最佳散熱的導熱塑膠
- 串聯安裝以實現無縫照明輸出
- 發光均勻,無LED光點
- 應用: 廚櫃、浴室櫃、衣櫃、展示櫃、零售店等



Specification 產品規格 >>

| Model 型號 | DC Voltage 電壓 (V) | Wattage 功率 (W) | Length 長度 (mm) | Lamp Life 光度壽命 (Hrs) | Colour Temp 色溫 (K) | Lumen Output 輸出流明 (Lm/W) | Color Rendering 顯色度 (CRI) | Beam Angle 光速角度 (°) | Operating Temperature 工作溫度 (°C) |
|----------------------|-------------------|----------------|----------------|----------------------|---------------------|--------------------------|---------------------------|---------------------|---------------------------------|
| CBL-P0707-S1004-109A | 12/24 | 4 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P0707-S1008-109A | 12/24 | 8 | 1000 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P0707-S1205-109A | 12/24 | 5 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |
| CBL-P0707-S1210-109A | 12/24 | 10 | 1200 | 50000 | 2700/3000/4000/6500 | 100 | >90 | 270 | -20~+45 |

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Length Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)、長度, 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意